



LUMIGO FLOOD48

BATTERY-OPERATED IP65 48X8W RGBL FX & PIXEL MAPPING
WASH WITH WIRELESS CRMX & APP CONTROL

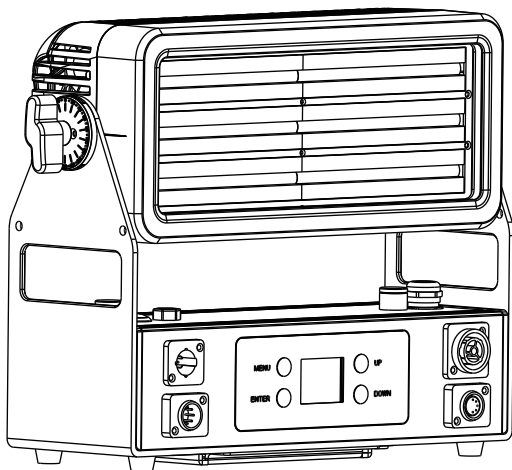

USER MANUAL



PRODUCT
DOCUMENTATION



DMX
CHART

www.cyclopslighting.com

INDEX

1. Safety Information	03
2. Technical Specifications	04
3. Device Overview	05
4. Installation	06
5. Control Panel	07
6. Menu Operation & Settings	13
7. DMX Channels	15

Please read carefully before use

Please Note: Specifications and improvements in the design of this unit and this manual are subject to change without any prior written notice.

1. SAFETY INFORMATION

Before you operate this unit read the manual carefully. Always make sure to include the manual if you pass/rent/sell the unit to another user. Keep in mind that this manual cannot address all possible dangers and environments. Please use your own caution when operating. This product is for professional use only. It is not for household use.



- Do not operate the unit in areas of high temperature conditions. It will cause abnormal function or damage the product.
- Always use a suitable safety wire when mounting the light overhead.
- Connect the safety wire only to the intended safety mount.
- Always follow local safety requirements.



- Only qualified personnel may repair this product.
- Do not open the product housing.
- Do not apply power if the light is damaged.



- Do not directly look into the light.
- It can cause harm to your eyes.
- Do not look at the LEDs with a magnifying glass or any other optical instrument that may concentrate the light output.
- Please don't look at the light directly when the light's radiation temperature reach 40 °C



- The exterior surfaces of the light can become hot, up to 55°C during normal operation.
- Ensure that accidental physical contact with the device is impossible.
- Install only in ventilated locations.
- Do not cover the light.



- Always charge with the flight case open.
- It is recommended to charge at a temperature between 15°C and 35°C



- Do not look directly at the light source.



- Don't throw the unit into the garbage at the end of its lifetime.
- Make sure to dispose is according to your local ordinances and/or regulations, to avoid polluting the environment!
- The packaging is recyclable and can be disposed.



—2.0m ta 45 °C

2. TECHNICAL SPECIFICATIONS

1. Standard Configuration

- 1x LumiGo FLOOD 48
- 1x True one power cable

2. Control Functions


- 01 / 04 / 11 / 18 / 22 / 48 / 58 CH
- Master&Slave mode
- CRMX Wireless DMX(optional)
- VISION APP(optional)

3. Features

- Light Source: 48*8W RGBL
- Native beam angle(s): 30°
- Initial field of view (spot angle): 120°*30°
- Power consumption: 103W
- Battery working time@ full light: Battery boost, 4H, 6H, 8H, 10H, 12H, 14H, 16H, 18H, 20H, 22H, 24H
- Battery charging time: 5H
- Battery capacity: 14.8V, 27AH
- Input voltage, nominal: 100 - 240V 50/60Hz
- Light output all LEDs on: 7040 LM
- Illuminance Lux @ 2m: 14136 lx
- Illuminance Lux @ 5m: 2262 lx
- Illuminance Lux @ 8m: 883 lx
- Illuminance Lux @ 10m: 565 lx
- Run Mode: DMX 512 / Master Slave / Auto Run
- Maximum 66 ID setting for easy separately control
- Wireless DMX from Sweden
- 10 internal programs and 10 customize programs
- 4 different dimming curve
- Strobe: 0 - 20Hz adjustable
- Tilt: 0-120°
- Pixel control: 6 Sections
- IP65
- Temperature: -40°C ~ 40°C
- N.W: 10.11 KG
- Dimensions: 399 x 140 x 270mm

3. DEVICE OVERVIEW

1. Connections

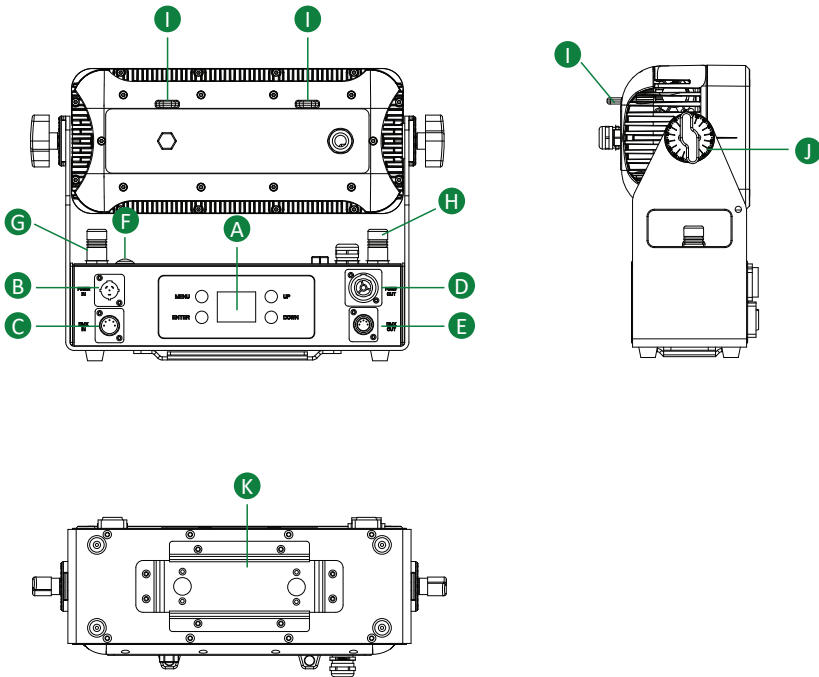

A: LCD Screen

B: Power In

C: DMX In

D: Power Out

E: DMX Out

F: Power button

G: Wireless

H: Antenna of bluetooth

I: Safety rope hole


J: Dial plate

K: Hanging panel

4. INSTALLATION

1. Customize your setup with various accessories to achieve diverse lighting effects and installation configurations. Options include:


- *Magnetic frost filter*



Magnetic frost filter


Both the light and the frost filter contain powerful magnets, enabling magnetic attachment upon the light. Includes a safety wire to ensure secure installation.

- *Barndoor*

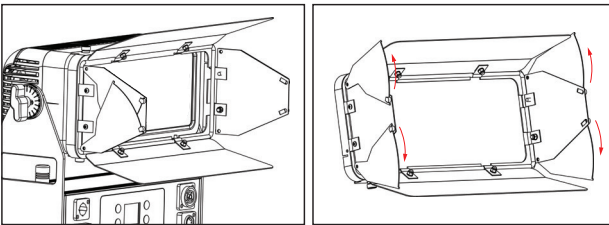

Two-sided barndoor

The barndoor equipped captive screws. Align the barndoor with the mounting holes, tighten the screws to secure it, then unfold for operation. The side opening page design effectively prevents light leakage.





One-sided barndoor


The barndoor is equipped with captive screws. Align it with the chassis holes and tighten the screws for secure installation.

5. CONTROL PANEL


5.1. Control Display

 LCD Touch Screen





  Press arrows to scroll up and down inside the menu and change values, such as DMX address

 Press ENTER to access theselection menu for system settings or confirm changes

5.2. Displayer Introduction

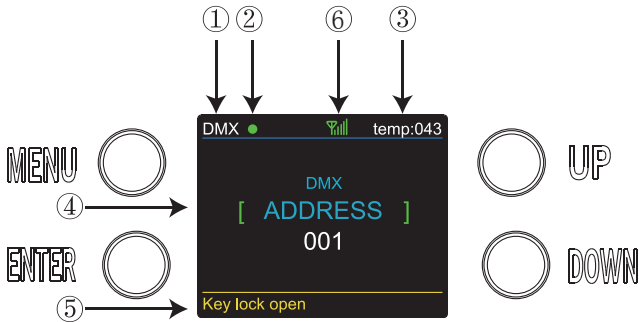


1. When you enter DMX Mode, it will be showed DMX, when you enter SLAVE Mode, it will be showed SLAVE.
2. This shows the condition of signal transmission. Green is connected. Red is disconnected.
3. This shows the temperature of the lights.
4. This shows the menus you can select.
5. This shows the condition of key lock. "Key lock open" means it is open and "Key lock off" means it is close.
6. This shows the condition of wireless signal. Green is connected. Red is disconnected.

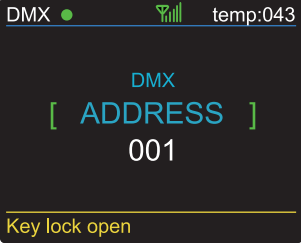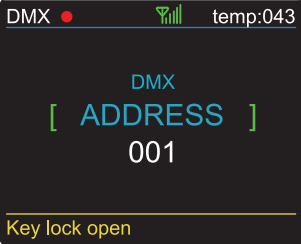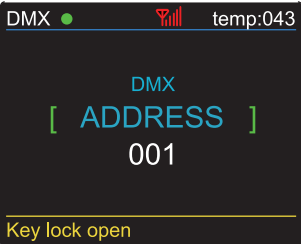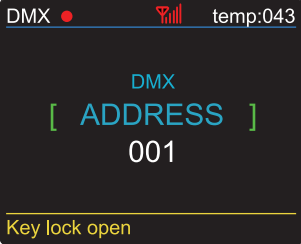	<p>While DMX and Wireless signal are green, it means DMX Mode and Wireless are connected.</p>
	<p>While DMX shows red but Wireless signal shows green, it means DMX Mode is disconnected and Wireless is connected.</p>
	<p>While DMX shows green but Wireless signal shows red, it means DMX Mode is connected and Wireless is disconnected.</p>
	<p>While DMX and Wireless are shown red, it means DMX Mode and Wireless are disconnected.</p>

3.CABLE CONNECTORS

Cablings must have a male XLR connector on one's end and a female XLR connector on the other's end.

DMX connector configuration

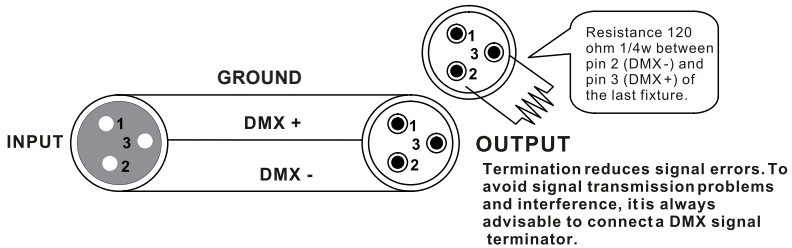

Caution: Do not allow contact between the ground and the fixture's chassis ground. Grounding the ground can cause a ground loop, and your fixture may perform erratically. Test cables with an ohm meter to verify positive pole and to make sure the pins are not grounded or shorted to the shield or each other.


3-PIN TO 5-PIN CONVERSION CHART


Please note if you use a controller with a 5 pin DMX output connector, you need to use a 5 pin to 3 pin adapter. The chart below details a proper cable conversion:

3-PIN TO 5-PIN CONVERSION CHART

Conductor	3 Pin Female (output)	5 Pin Male (Input)
Ground/Shield	Pin 1	Pin 1
Data (-) signal	Pin 2	Pin 2
Data (+) signal	Pin 3	Pin 3
Do not use		Do not use
Do not use		Do not use

PROGRAMME MENU

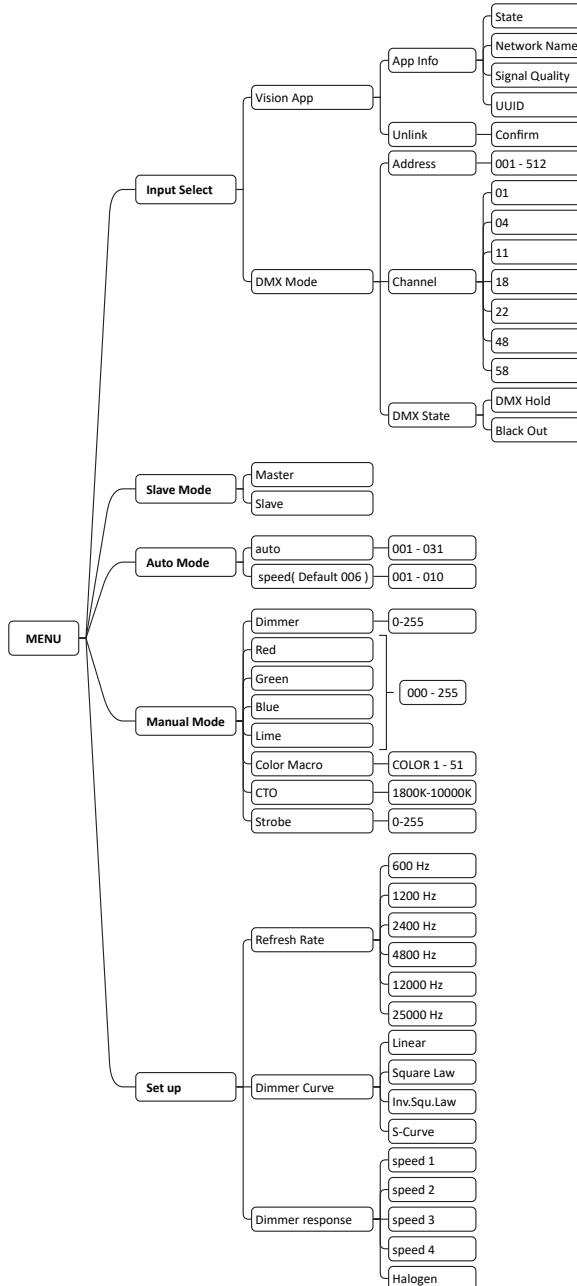

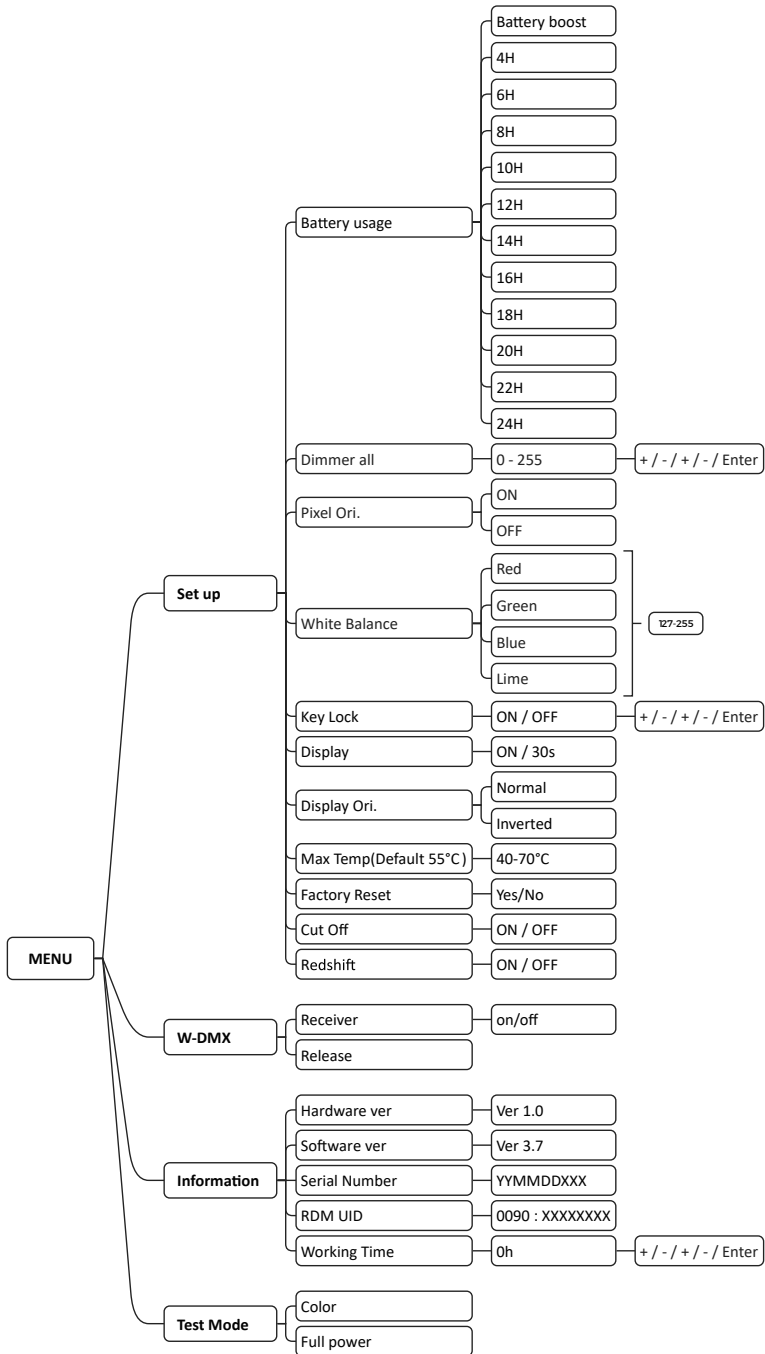

6. MENU OPERATION & SETTINGS

DMX Address and Channels Mode-In these menu,you can connect several pieces of lights with DMX cable and control them with control console.

1. Press "ENTER" and then press "UP" or "DOWN" to "DMX Address" or "Channels Mode" and press "ENTER".

1) "XXX" will be showed in "DMX Address", "XXX" means the Address 1-512. You can press "UP" or "DOWN" to select the address you desired.

2) "Channel [xx]" will be showed in "Channels Mode", "XX" means 7 kinds of DMX Channels Modes. You can press "UP" or "DOWN" to select the Channel Mode you desired.

3) DMX STATE-In this menu,you can choose the DMX signal you desired. Press "ENTER" and you can choose "BLACKOUT" or "DMX HOLD";"BLACKOUT" means cut off the DMX signal and "DMX HOLD" means connect DMX signal.

SLAVE MODE-In this menu, you can select one light as the MASTER light and other lights in SLAVE Mode will run following the MASTER light.

1. Press "ENTER" and then press "UP" or "DOWN" to "SLAVE Mode".

2.Press "ENTER" and "SLAVE" will be showed, then press "ENTER" to select.

AUTO MODE-In this menu, you can select your desire AUTO Mode and adjust the running speed.

1. Press "ENTER" and then press "UP" or "DOWN" to "AUTO MODE".

2. Press "ENTER" then "SPEED" or "AUTO MODE" is showed.Then press "ENTER" and you can see 2 items as below:

1) SPEED - It provides "01-10" for you choose.

2) AUTO MODE - It provides "AUTO 1- AUTO 31" for you choose.

Manual MODE-In this menu,you can adjust dimmer, halogen, strobe you desired.

1. Press "ENTER" and then press "UP" or "DOWN" to "MANUAL MODE".

2. Press "ENTER" and there has 8 options then press "UP" or "DOWN" to select the value you desired as below:

1) Dimmer - You can adjust the overall brightness in this menu.

2) Red - You can adjust the brightness of Red in this menu.

3) Green - You can adjust the brightness of Green in this menu.

4) Blue - You can adjust the brightness of Blue in this menu.

5) Lime - You can adjust the brightness of Lime in this menu.

6) Color Macro - You can select color 0-51 in this menu.

7) CTO - You can adjust the color temperature in this menu.

8) STROBE - You can adjust the speed of strobe in this menu.

SET UP-In this menu, you can adjust the value of the function.

1. Press "ENTER" and then press "UP" or "DOWN" to "SET UP".

2. Press "ENTER" and there has 13 options then press "ENTER" to select the options and press "UP" or "DOWN" to select the value you desired as below:

1)RedShift - In this item,the lamp displays the halogen effect when you select ON,and the lamp turns off the halogen effect when you select OFF.

2)Refresh Rate - it provides 1-18KHz of refresh rates for your choose

3)Dimmer Curve - It provides 4 kinds of dimmer curves for you choose.

4)Dimmer response - It provides 4 kinds of dimmer speed for you choose.

5)Pixel Orientation - You can select "OFF" or "ON" set the forward and reverse direction of the auxiliary light and white light scrolling.

6)User CAL - You can adjust the brightness of Red, Green, Blue, Lime.

- 7)Key Lock - You can select "OFF" or "ON" to make the Key Lock turn off all the time or turns on.
- 8)Display - You can select "OFF" or "30s".
- 9) Display Orientation - You can select "Normal" or "Inverted".
- 10) Bat Time - You can select different battery usage times for "Battery boost/ 4H/ 6H/ 8H/ 10H/ 12H/ 14H/ 16H /18H/20H/ 22H/ 24H".
- 11) Max Temp - The max temperature range for use is 40-70°C
- 12) Redshift - You can select "on" or "off" to enable the Redshift.
- 13) FACTORY RESET-In this item, you can reset all the value of the system.

Wireless-In this menu,you can receiver and release wireless signals.

- 1.Press"ENTER"button and then UP or DOWN button until "Wireless" is showed.
- 2.Press"ENTER"button,and "Receiver" or "Release" will be showed. Then press ENTER,and you can see two items as below:
 - 1)Receiver- In this item,you can select "ON"or "OFF".If you select ON,you can use the wireless reception function.And if you select OFF,wireless reception will be turned off.
 - 2)Release-In this item, you can clear wireless signals."SUCCEESS" will be displayed when the wireless signal is successfully cleared.

INFORMATION-In this menu, you can learn about the information of RDM, software, hardware , serial number, temperatures and the run time of the light.

1. Press "ENTER" and then press "UP" or "DOWN" to "INFORMATION".
2. Press "ENTER" and select "RDM" , "Serial number" , "Software" , "Hardware" or "Working Time".Then press "ENTER",you can see 5 items as below:
 - 1) Serial number - It shows the serial number information.
 - 2) Hardware - It shows the Hardware information.
 - 3) Software - It shows the Software information.
 - 4) RDMUID - It shows RDM information.
 - 5) Working Time - It shows the working hours of the light.

Test mode - In this menu,you can test if the light work normally.

1. Press "ENTER" and then press "UP" or "DOWN" to "Test mode".
- 2.Press"ENTER"button,and "Color" or "Full power" will be showed. Then press ENTER,and you can see two items as below:
 - 1) Color - Test RGB LED twice.
 - 2) Full power - Test RGB and white light full brightness for 5s.

7. DMX CHANNELS

CHANNEL 01		
Channel	Function	Value
1	Halogen	000 - 255

CHANNEL 04		
Channel	Function	Value
1	Red	000 - 255
2	Green	000 - 255
3	Blue	000 - 255
4	Lime	000 - 255

CHANNEL 11		
Channel	Function	Value
1	Master dimmer	000 - 255
2	Shutter	000 - 255
3	Red	000 - 255
4	Green	000 - 255
5	Blue	000 - 255
6	Lime	000 - 255
7	Color macro	000 - 255
8	CTO	000 - 255
9	Auto	000 - 255
10	Auto speed	000 - 255
11	Fade	000 - 255

CHANNEL 18		
Channel	Function	Value
1	Master dimmer	000 - 255
2	Master dimmer fine	000 - 255
3	Shutter	000 - 255
4	Red	000 - 255
5	Red fine	000 - 255
6	Green	000 - 255
7	Green fine	000 - 255
8	Blue	000 - 255
9	Blue fine	000 - 255
10	Lime	000 - 255
11	Lime fine	000 - 255
12	Color macro	000 - 255
13	CTO	000 - 255
14	Dimmer speed	000 - 255
15	Auto	000 - 255
16	Auto speed	000 - 255
17	Fade	000 - 255
18	Device settings	000 - 255

CHANNEL 22		
Channel	Function	Value
1	Master dimmer	000 - 255
2	Master dimmer fine	000 - 255
3	Shutter	000 - 255
4	Red	000 - 255
5	Green	000 - 255
6	Blue	000 - 255
7	Lime	000 - 255
8	No function	000 - 012
	Color macro	013 - 227
	CTO	228 - 255
9	Dimmer speed	000 - 255
10	LED 1 Dimmer	000 - 255
11	LED 2 Dimmer	000 - 255
12	LED 3 Dimmer	000 - 255

13	LED 4 Dimmer	000 - 255
14	LED 5 Dimmer	000 - 255
15	LED 6 Dimmer	000 - 255
16	LED 7 Dimmer	000 - 255
17	LED 8 Dimmer	000 - 255
18	LED 9 Dimmer	000 - 255
19	LED 10 Dimmer	000 - 255
20	LED 11 Dimmer	000 - 255
21	LED 12 Dimmer	000 - 255
22	Device settings	000 - 255

CHANNEL 48		
Channel	Function	Value
1	LED 1 Red	000 - 255
2	LED 1 Green	000 - 255
3	LED 1 Blue	000 - 255
4	LED 1 Lime	000 - 255
5	LED 2 Red	000 - 255
6	LED 2 Green	000 - 255
7	LED 2 Blue	000 - 255
8	LED 2 Lime	000 - 255
9	LED 3 Red	000 - 255
10	LED 3 Green	000 - 255
11	LED 3 Blue	000 - 255
12	LED 3 Lime	000 - 255
13	LED 4 Red	000 - 255
14	LED 4 Green	000 - 255
15	LED 4 Blue	000 - 255
16	LED 4 Lime	000 - 255
17	LED 5 Red	000 - 255
18	LED 5 Green	000 - 255
19	LED 5 Blue	000 - 255
20	LED 5 Lime	000 - 255
21	LED 6 Red	000 - 255
22	LED 6 Green	000 - 255
23	LED 6 Blue	000 - 255
24	LED 6 Lime	000 - 255
25	LED 7 Red	000 - 255
26	LED 7 Green	000 - 255

27	LED 7 Blue	000 - 255
28	LED 7 Lime	000 - 255
29	LED 8 Red	000 - 255
30	LED 8 Green	000 - 255
31	LED 8 Blue	000 - 255
32	LED 8 Lime	000 - 255
33	LED 9 Red	000 - 255
34	LED 9 Green	000 - 255
35	LED 9 Blue	000 - 255
36	LED 9 Lime	000 - 255
37	LED 10 Red	000 - 255
38	LED 10 Green	000 - 255
39	LED 10 Blue	000 - 255
40	LED 10 Lime	000 - 255
41	LED 11 Red	000 - 255
42	LED 11 Green	000 - 255
43	LED 11 Blue	000 - 255
44	LED 11 Lime	000 - 255
45	LED 12 Red	000 - 255
46	LED 12 Green	000 - 255
47	LED 12 Blue	000 - 255
48	LED 12 Lime	000 - 255

CHANNEL 58		
Channel	Function	Value
1	Master Dimmer	000 - 255
2	Master dimmer fine	000 - 255
3	Shutter	000 - 255
4	LED 1 Red	000 - 255
5	LED 1 Green	000 - 255
6	LED 1 Blue	000 - 255
7	LED 1 Lime	000 - 255
8	LED 2 Red	000 - 255
9	LED 2 Green	000 - 255
10	LED 2 Blue	000 - 255
11	LED 2 Lime	000 - 255
12	LED 3 Red	000 - 255
13	LED 3 Green	000 - 255
14	LED 3 Blue	000 - 255
15	LED 3 Lime	000 - 255
16	LED 4 Red	000 - 255
17	LED 4 Green	000 - 255

18	LED 4 Blue	000 - 255
19	LED 4 Lime	000 - 255
20	LED 5 Red	000 - 255
21	LED 5 Green	000 - 255
22	LED 5 Blue	000 - 255
23	LED 5 Lime	000 - 255
24	LED 6 Red	000 - 255
25	LED 6 Green	000 - 255
26	LED 6 Blue	000 - 255
27	LED 6 Lime	000 - 255
28	LED 7 Red	000 - 255
29	LED 7 Green	000 - 255
30	LED 7 Blue	000 - 255
31	LED 7 Lime	000 - 255
32	LED 8 Red	000 - 255
33	LED 8 Green	000 - 255
34	LED 8 Blue	000 - 255
35	LED 8 Lime	000 - 255
36	LED 9 Red	000 - 255
37	LED 9 Green	000 - 255
38	LED 9 Blue	000 - 255
39	LED 9 Lime	000 - 255
40	LED 10 Red	000 - 255
41	LED 10 Green	000 - 255
42	LED 10 Blue	000 - 255
43	LED 10 Lime	000 - 255
44	LED 11 Red	000 - 255
45	LED 11 Green	000 - 255
46	LED 11 Blue	000 - 255
47	LED 11 Lime	000 - 255
48	LED 12 Red	000 - 255
49	LED 12 Green	000 - 255
50	LED 12 Blue	000 - 255
51	LED 12 Lime	000 - 255
52	Dimmer speed	000 - 255
53	Color macro	000 - 255
54	CTO	000 - 255
55	Auto	000 - 255
56	Auto speed	000 - 255
57	Fade	000 - 255
58	Device settings	000 - 255

CTO					
8	16	1800K	134	142	4600K
17	25	2000K	143	151	4800K
26	34	2200K	152	160	5000K
35	43	2400K	161	169	5500K
44	52	2600K	170	178	6000K
53	61	2800K	179	187	6500K
62	70	3000K	188	196	7000K
71	79	3200K	197	205	7500K
80	88	3400K	206	214	8000K
89	97	3600K	215	223	8500K
98	106	3800K	224	232	9000K
107	115	4000K	233	241	9500K
116	124	4200K	242	255	10000K
125	133	4400K			

Auto					
6	12	Auto 1	133	140	Auto 17
13	20	Auto 2	141	148	Auto 18
21	28	Auto 3	149	156	Auto 19
29	36	Auto 4	157	164	Auto 20
37	44	Auto 5	165	172	Auto 21
45	52	Auto 6	173	180	Auto 22
53	60	Auto 7	181	188	Auto 23
61	68	Auto 8	189	196	Auto 24
69	76	Auto 9	197	204	Auto 25
77	84	Auto 10	205	212	Auto 26
85	92	Auto 11	213	220	Auto 27
93	100	Auto 12	221	228	Auto 28
101	108	Auto 13	229	236	Auto 29
109	116	Auto 14	237	239	Auto 30
117	124	Auto 15	240	255	Auto 31
125	132	Auto 16			

Shutter (slow to fast)			Dimmer speed(wait 3s to execute and store)		
0	45	No function	0	49	No function
46	75	Strobe	50	89	Dimmer speed 1
76	135	Random Strobe	90	129	Dimmer speed 2
136	165	Pulse Strobe	130	169	Dimmer speed 3
166	195	Random Pulse Strobe	170	209	Dimmer speed 4
196	225	Fade up strobe	210	255	Halogen
226	255	Fade down strobe			





Color macro + CTO					
13	16	COLOR 1	117	120	COLOR 27
17	20	COLOR 2	121	124	COLOR 28
21	24	COLOR 3	125	128	COLOR 29
25	28	COLOR 4	129	132	COLOR 30
29	32	COLOR 5	133	136	COLOR 31
33	36	COLOR 6	137	140	COLOR 32
37	40	COLOR 7	141	144	COLOR 33
41	44	COLOR 8	145	148	COLOR 34
45	48	COLOR 9	149	152	COLOR 35
49	52	COLOR 10	153	156	COLOR 36
53	56	COLOR 11	157	160	COLOR 37
57	60	COLOR 12	161	164	COLOR 38
61	64	COLOR 13	165	168	COLOR 39
65	68	COLOR 14	169	172	COLOR 40
69	72	COLOR 15	173	176	COLOR 41
73	76	COLOR 16	177	180	COLOR 42
77	80	COLOR 17	181	184	COLOR 43
81	84	COLOR 18	185	188	COLOR 44
85	88	COLOR 19	189	192	COLOR 45
89	92	COLOR 20	193	196	COLOR 46
93	96	COLOR 21	197	200	COLOR 47
97	100	COLOR 22	201	204	COLOR 48
101	104	COLOR 23	205	208	COLOR 49
105	108	COLOR 24	209	212	COLOR 50
109	112	COLOR 25	213	227	COLOR 51
113	116	COLOR 26			

228	1800K	242	4600K	
229	2000K	243	4800K	
230	2200K	244	5000K	
231	2400K	245	5500K	
232	2600K	246	6000K	
233	2800K	247	6500K	
234	3000K	248	7000K	
235	3200K	249	7500K	
236	3400K	250	8000K	
237	3600K	251	8500K	
238	3800K	252	9000K	
239	4000K	253	9500K	
240	4200K	254	255	10000K
241	4400K			




Device Setting(wait 3s to execute and store)		
0	45	No function
46	50	Pixel orientation ON
51	55	Pixel orientation OFF
56	60	Linear
61	65	Square Law
66	70	Inverse Square Law
71	75	S - Curve
76	89	No function
90	99	Calibrated Color Output Mode - COLOR CALIB = ON
100	109	No function
110	119	Raw Color Output Mode - COLOR CALIB = OFF
120	129	No function
130	139	600Hz
140	149	1200Hz
150	159	2400Hz
160	169	4800Hz
170	179	12000Hz
180	189	25000Hz
190	229	No function
230	234	Redshift OFF
235	239	Redshift ON
240	244	Display ON
245	249	Display 30s
250	255	Factory reset

Color macro					
5	9	COLOR 1	135	139	COLOR 27
10	14	COLOR 2	140	144	COLOR 28
15	19	COLOR 3	145	149	COLOR 29
20	24	COLOR 4	150	154	COLOR 30
25	29	COLOR 5	155	159	COLOR 31
30	34	COLOR 6	160	164	COLOR 32
35	39	COLOR 7	165	169	COLOR 33
40	44	COLOR 8	170	174	COLOR 34
45	49	COLOR 9	175	179	COLOR 35
50	54	COLOR 10	180	184	COLOR 36
55	59	COLOR 11	185	189	COLOR 37
60	64	COLOR 12	190	194	COLOR 38
65	69	COLOR 13	195	199	COLOR 39
70	74	COLOR 14	200	204	COLOR 40
75	79	COLOR 15	205	209	COLOR 41
80	84	COLOR 16	210	214	COLOR 42
85	89	COLOR 17	215	219	COLOR 43
90	94	COLOR 18	220	224	COLOR 44
95	99	COLOR 19	225	229	COLOR 45
100	104	COLOR 20	230	234	COLOR 46
105	109	COLOR 21	235	239	COLOR 47
110	114	COLOR 22	240	244	COLOR 48
115	119	COLOR 23	245	249	COLOR 49
120	124	COLOR 24	250	254	COLOR 50
125	129	COLOR 25	255		COLOR 51
130	134	COLOR 26			


DIMMER CURVE



MECHANICAL SPECIFICATION



ACCESSORY




Power cable




Fast lock


OPTIONAL ACCESSORIES



Magnetic frost filter




One-sided barndoor



Two-sided barndoor

RDM compliance:ANSI/ESTA E.120

Parameter ID	Command 'Discovery'	Command 'Set'	Command 'Get'
DISC_UNIQUE_BRANCH	√		
DISC_MUTE	√		
DISC_UN_MUTE	√		
DEVICE_INFO			√
SUPPORTED_PARAMETERS			√
SOFTWARE_VERSION_LABEL			√
DMX_START_ADDRESS		√	√
IDENTIFY_DEVICE		√	√
DEVICE_MODEL_DESCRIPTION			√
PARAMETER_DESCRIPTION			√
MANUFACTURER_LABEL			√
DEVICE_LABEL		√	√
FACTORY_DEFAULTS		√	√
BOOT_SOFTWARE_VERSION_ID			√
BOOT_SOFTWARE_VERSION_LABEL			√
DMX_PERSONALITY		√	√
DMX_PERSONALITY_DESCRIPTION			√
SLOT_INFO			√
SLOT_DESCRIPTION			√
SENSOR_DEFINITION			√
SENSOR_VALUE			√
DEVICE_HOURS			√
LAMP_HOURS			√
RESET_DEVICE		√	
DIMMER CURVE		√	√
DMX STATE		√	√
DIMMER SPEED		√	√

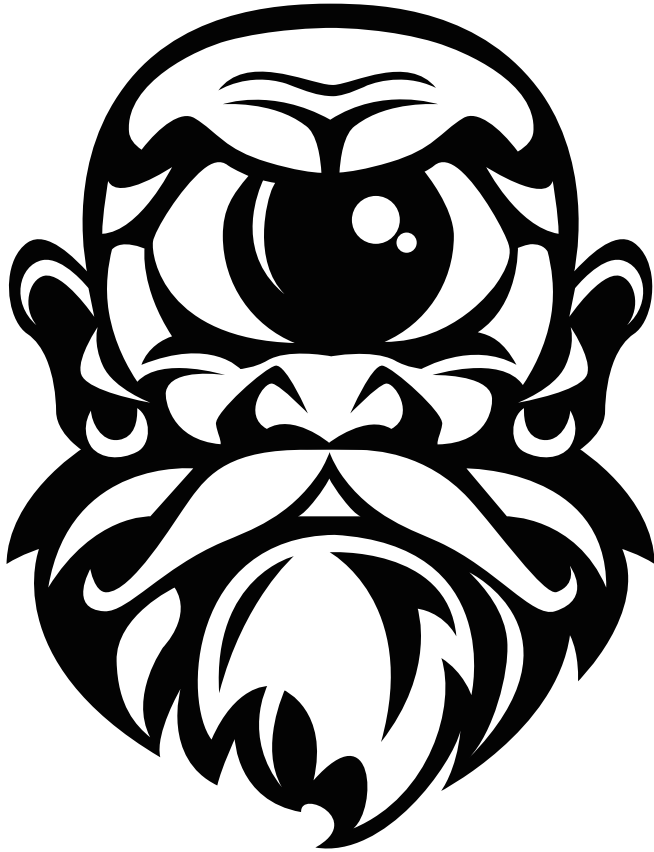

CYCLOPS LIGHTING

Cyclops Lighting creates professional lighting fixtures for **lighting professionals**. Our extensive product catalog covers every lighting application, from small to big, from simple to complex. We focus on maximizing value for our users, ensuring superior **performance**, complete **documentation** and expert **worldwide support**.



www.cyclopslighting.com