


INTEGRAL series



INTEGRAL-M88

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 21/07/2026

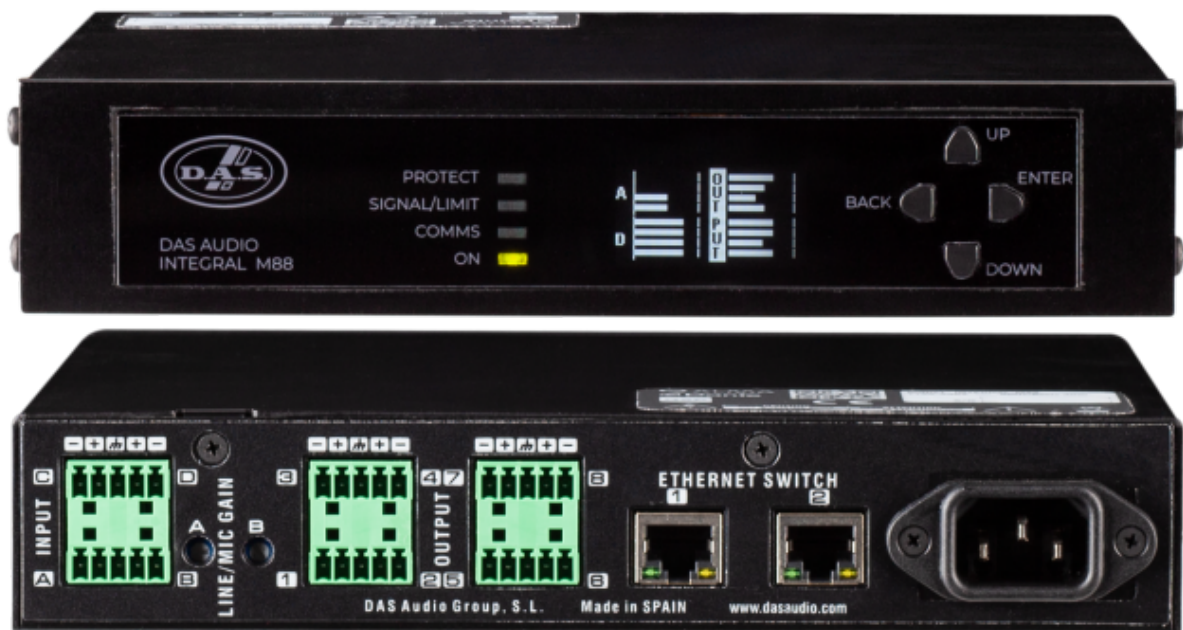

KEY FEATURES

- 8 CH Matrix with high-performance integrated DSP
- 4 independent analog inputs
- 2 inputs with selectable MIC/Line option and phantom
- 8 Analog output channels
- 4 x 4 CH DANTE digital audio
- ALMA management control and monitoring
- Priority assignment
- Input and output flexible routing

DESCRIPTION

INTEGRAL-M88 is a half rack mount 1U size installation matrix with 4 analog input channels and eight analog output channels. Besides the analog audio inputs and outputs, a DANTE digital audio 4x4 chipset is included by default with the units. Control, configuration and management of the devices shall be done via ALMA software over IP or using Open Sound Control (OSC) protocol.

Priority capabilities, full matrix and routing options make this unit essential as the "brain" of any type of installation. The internal memory resources allow to store more than 100 "global presets" and more than 200 "output channel presets" (speaker presets). A bank of output channel presets with specific processing parameters for all DAS Audio speakers is included allowing the users to configure each channel independently. For instance, it would be possible to recall for output 1 the preset of Q-23T, for output 2 the preset of Arco-4T, for output 3 the preset of Q-10 etc.

The unit includes an OLED display (1.54") with control knobs for intuitive and easy navigation as well meters to monitor signal levels. Basic parameters can be accessible via front panel control knobs; input and output levels, global preset recall, output channel preset recall, mute, source selection, link manager functions, priority enabling etc.

Two of the analogue inputs can be switched to microphone with 12V Phantom power if needed.

The unit also Integrates an Ethernet Switch for daisy-chain connections. No external switch is needed.

WiFi and Bluetooth are available for direct wireless operation.

INTEGRAL-M88

SPECIFICATIONS

Electronics and Audio

Frequency Response	20 Hz-30 kHz (+0 -0.5 dB)
Max Input Level	+22 dBu
Max. Output Level	+22 dBu
Controls	Power On/Off, Navigation Buttons
Phantom Power	+ 12V DC
Sampling Rate	48 kHz
Display	OLED 1.54"
Cooling	Side-Right-to-Left
LED Indicators	On, Comms, Signal, Protect

Connectors

Analog Audio Input Connectors	2 x 3.5 mm Pitch Terminal Block
Analog Audio Output Connectors	4 x 3.5 mm Pitch Terminal Block
DANTE Digital In/Out Connectors	2 x RJ45 Fast Ethernet

Power

AC Input Connector	IEC 15A
Power Supply	Universal Mains Switch Mode
Operating Range	90 - 250 VAC

INTEGRAL-M88

DSP

Analog Input Channels	4
Analog Output Channels	8
DANTE Input Channels	4
DANTE Output Channels	4
AD Converters	24 Bit @ 48 kHz 118 dBA Dynamic Range
DA Converters	24 Bit @ 48 kHz 118 dBA Dynamic Range
Internal Precision	32 Bit, 64 Bits Double Precision
Latency	1 ms
Delay	50ms per input / 135ms per output
Equalizer	Bell, Lo/Hi-Shelving, Hos
Crossover	Linkwitz-Riley, Butterworth, Bessel
High and Low Pass Filters	Up to 48 dB/oct
Limiters	RMS, Peak

Dimensions-Weight


Dimensions (H x W x D)	44 x 215 x 210 mm 1,7 x 8,5 x 8,3 in
Net Weight	1,7 kg (3,7 lb)

INTEGRAL-M88

Shipping

Carton Dimensions (H x W x D)	440 x 400 x 60 mm
	17,3 x 15,7 x 2,4 in
Shipping Weight	7,5 kg (16,5 lb)

DIMENSIONS

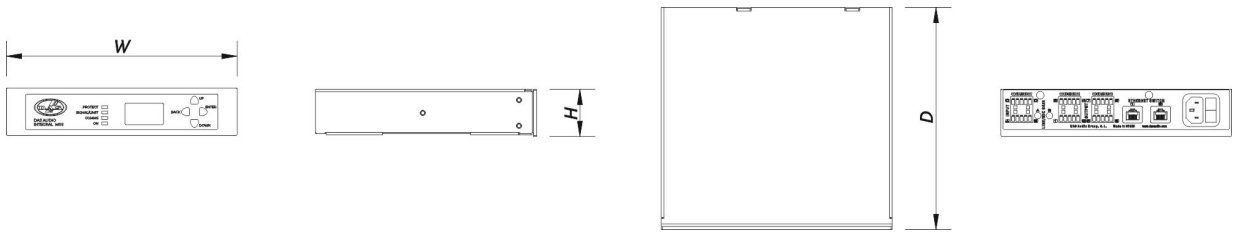

INTEGRAL-M88

ORDERING INFORMATION

Model	Description	P/N
System		
INTEGRAL-M88		10721170
Replacement Parts		
KIT-DSP-INTEGRAL-M88	Replacement Dsp	20407030
Accessories		
PATCH-M88	Integral Series	20503091

INTEGRAL-M88

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 21/07/2026

