

MIA SERIES



MIA-X10.116

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 21/09/2026

 **DAS AUDIO**

KEY FEATURES

- 2-way passive 10" coaxial point source system
- Nominal 110° x 60° coverage
- Wide-coverage asymmetric HF waveguide
- Frequency range (-10 dB) from 55 Hz to 20 kHz
- Maximum SPL of 132 dB
- Dedicated FIR processing with INTEGRAL-MA

DESCRIPTION

MIA-X10.116 is a 2-way passive coaxial point source system designed to deliver accurate and consistent sound performance in applications where wide, even coverage is required. It features a high-performance 10" coaxial transducer, providing excellent phase coherence and a balanced response across the audible spectrum, with a frequency range of 55 Hz to 20 kHz and a maximum SPL of 132 dB.

The system incorporates an asymmetric high-frequency waveguide with wide coverage, providing a nominal dispersion of 110° x 60°. The waveguide can be rotated to adapt the coverage pattern to the orientation and requirements of each installation. This dispersion pattern is optimized to provide wide and uniform sound distribution, prioritizing coverage of the listening area, consistency across zones, and intelligibility.

The coaxial loudspeaker employs a 10" low-frequency driver with a 3" voice coil combined with a high-frequency compression driver featuring a 2.5" voice coil. This large voice coil architecture provides very high sensitivity and enables the system to deliver high maximum SPL with stable, controlled response.

With a nominal impedance of 8 Ω , MIA-X10.116 allows up to 2 systems to be connected per amplifier channel, optimizing amplifier channel usage. In addition, its 400 W RMS and 1600 W peak power handling reinforce its output capability in a compact format.

The system is manufactured from high-quality birch plywood with a durable polyurea paint finish. Its multi-angle design allows for flexible mounting in a wide variety of installation configurations, while the black finish enables discreet aesthetic integration into professional installations.

The system is equipped with M5 fixing points on the rear panel, allowing the use of dedicated mounting accessories for wall and/or ceiling installation. These accessories enable precise adjustment of both horizontal and vertical aiming angles, ensuring optimal coverage in each project.

MIA-X10.116 is a compact, high-output, wide-coverage solution for projects where uniform sound distribution, intelligibility, and sound pressure are key factors.

MIA-X10.116

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	55 Hz – 20 kHz
Horizontal Coverage (-6 dB)	110°
Vertical Coverage	60°
Nominal Impedance	8 ohms
Maximum Linear SPL ¹	128 dB
Maximum SPL ²	132 dB
RMS Power Handling	400 W
Peak Power Handling	1600 W
On-axis Sensitivity 1W/1 m	96 dB SPL
Recommended Amplifier	INTEGRAL-MA3004
	INTEGRAL-MA1502
Recommended Processor	INTEGRAL-MA3004
	INTEGRAL-MA1502

1. Measured Maximum Linear SPL at 1m according to AES75 standard using 18dB crest factor M-Noise.

2. Measured Maximum SPL at 1m using burst noise.

Connectors

Audio Input Connector	4-way Phoenix 3.8 mm
-----------------------	----------------------

MIA-X10.116


Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Rigging	M5 Thread Inserts
Finish	ISO-flex Paint
Color	Black
Dimensions (H x W x D)	485 x 290 x 345 mm 19,0 x 11,5 x 13,6 in
Net Weight	15,7 kg (34,5 lb)

Shipping

Carton Dimensions (H x W x D)	565 x 370 x 410 mm 22,3 x 14,6 x 16,2 in
Shipping Weight	17,4 kg (38,3 lb)

DIMENSIONS

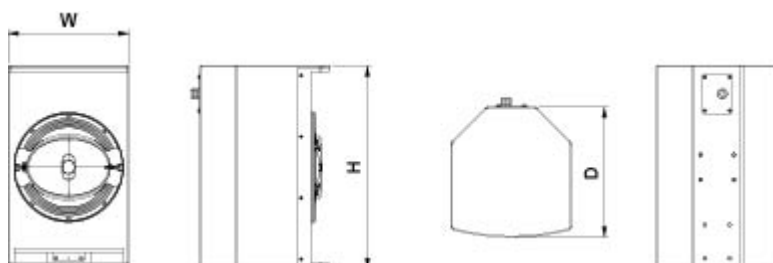

MIA-X10.116

ORDERING INFORMATION

Model	Description	P/N
System		
MIA-X10.116		15005738
Accessories		
AXW-MIA-X10	Installation & Stacking Acc.	15010431

MIA-X10.116

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 21/09/2026

