

WR series



WR-218S-DX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 15/04/2026

 **DAS AUDIO**

KEY FEATURES

- Weather resistant subwoofer system
- Fiberglass exterior finish
- 4000 W program power handling
- 2 x 18LX low frequency loudspeakers
- For use in bi-amplified systems
- Stainless steel rigging hardware

DESCRIPTION

The WR-218S is a passive subwoofer with an IP54 rating, designed for permanent professional outdoor installations. It incorporates two 18" loudspeakers, model 18LX, for low-frequency reproduction, delivering high sound pressure levels and extended low-frequency response for sound reinforcement applications in outdoor environments. This subwoofer is designed to reinforce low-frequency reproduction in WR-320-DX line array systems. Its ultra-compact enclosure, made of birch plywood, minimizes unwanted vibrations and helps reduce distortion while maintaining stable acoustic performance under demanding conditions. This model is available in black or white finishes to facilitate integration into different environments.

The WR Series is designed to offer high resistance and durability in permanent outdoor installations. All metal components of the system are made of stainless steel to ensure high corrosion resistance. The connectors feature protection against liquids and dust through hermetic sealing and include a drainage system that prevents water accumulation. The grilles incorporate a three-layer textile barrier composed of acoustic fabric, filtering foam and a hydrophobic mesh that blocks dust, dirt and moisture without affecting sonic performance. All systems in the WR series share these protection specifications.

The WR-218S is manufactured exclusively in the DX (Direct Exposure) version, designed for installations fully exposed to the elements and equipped with a reinforced fiberglass exterior.

WR-218S-DX

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	29 Hz – 160 Hz
Nominal Impedance	4 ohms
RMS Power Handling	2000 W
Peak Power Handling	8000 W
On-axis Sensitivity 1W/1 m	99 dB SPL
Maximum Peak SPL at 1 m	139 dB

Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Rectangular
Rigging	M10 Rigging Points
Finish	Fiberglass
Color	Black
IP Rating	IP54
Dimensions (H x W x D)	550 x 1.065 x 675 mm 21,7 x 41,9 x 26,6 in
Net Weight	70,0 kg (154,3 lb)

WR-218S-DX


Components

LF Driver	18LX
-----------	------

Shipping

Carton Dimensions (H x W x D)	595 x 1.145 x 722 mm
	23,4 x 45,0 x 28,4 in
Shipping Weight	80,0 kg (176,0 lb)

DIMENSIONS

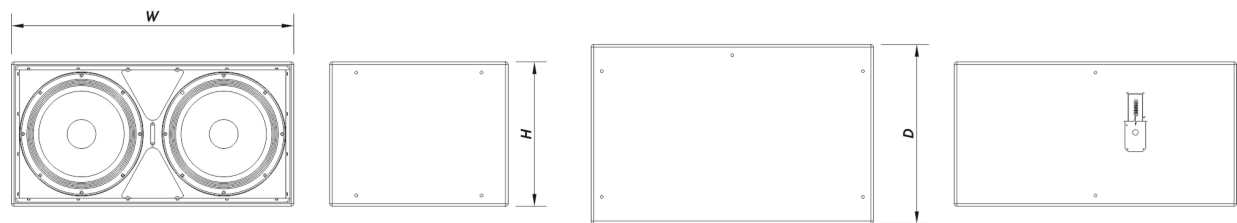

WR-218S-DX

ORDERING INFORMATION

Model	Description	P/N
System		
WR-218S-DX		10428249
Replacement Parts		
18LX	Cone Transducer	10214270
GM-18LX	Recone Kit	20208310
Accessories		
ANL-2	Rigging Accessories	10101020

WR-218S-DX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 15/04/2026

