

WR series



WR-9606-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 07/07/2026

 **DAS AUDIO**

KEY FEATURES

- 2-way system for outdoor installation
- Weather resistant, environmental performance IP56
- Single 6" loudspeaker
- 1" annular diaphragm M-26 compression driver
- 90°x60° dispersion
- Threaded fixing points for wall mounts
- Rating CX (covered exposure)

DESCRIPTION

The WR-9606 is a two-way passive system with an IP56 rating, designed for permanent professional outdoor installations. It incorporates a 6" loudspeaker for low-frequency reproduction and a compression driver with a 1" annular diaphragm that provides defined high-frequency reproduction. Its ultra-compact enclosure, made of birch plywood, minimizes unwanted vibrations and helps reduce distortion while maintaining stable acoustic performance under demanding conditions. This model is available in black or white finishes to facilitate integration into different environments.

The WR Series is designed to offer high resistance and durability in permanent outdoor installations. All metal components of the system are made of stainless steel to ensure high corrosion resistance. The connectors feature protection against liquids and dust through hermetic sealing and include a drainage system that prevents water accumulation. The grilles incorporate a three-layer textile barrier composed of acoustic fabric, filtering foam and a hydrophobic mesh that blocks dust, dirt and moisture without affecting sonic performance. In addition, the WR Series is available in CX (Covered Exposure) versions for partially covered installations, and DX (Direct Exposure) versions designed for locations fully exposed to the elements.

All WR Series systems share these protection specifications. This model corresponds to the CX version, designed for covered exposure installations and protected by an ISO-Flex polyurea coating.

WR-9606-CX

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	70 Hz – 22 kHz
Horizontal Coverage (-6 dB)	90°
Vertical Coverage	60°
Nominal Impedance	8 ohms
RMS Power Handling	100 W
Peak Power Handling	400 W
On-axis Sensitivity 1W/1 m	92 dB SPL
Maximum Peak SPL at 1 m	118 dB

Recommended Amplifier	INTEGRAL-A402
	INTEGRAL-A404
	INTEGRAL-A1002
	INTEGRAL-A1004
	INTEGRAL-A1602
	INTEGRAL-A1604
	INTEGRAL-MA1004
	INTEGRAL-MA1604

Recommended Processor	INTEGRAL-M88
	INTEGRAL-MA1604
	INTEGRAL-MA1004

Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

WR-9606-CX


Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Rigging	M10 Rigging Points
Finish	ISO-flex Paint
Color	Black
IP Rating	IP56
Dimensions (H x W x D)	385 x 220 x 255 mm
	15,2 x 8,7 x 10,0 in
Net Weight	9,0 kg (19,9 lb)

Components

LF Driver	6B
HF Driver	M-26
Horn/Waveguide	BCT-96

DIMENSIONS

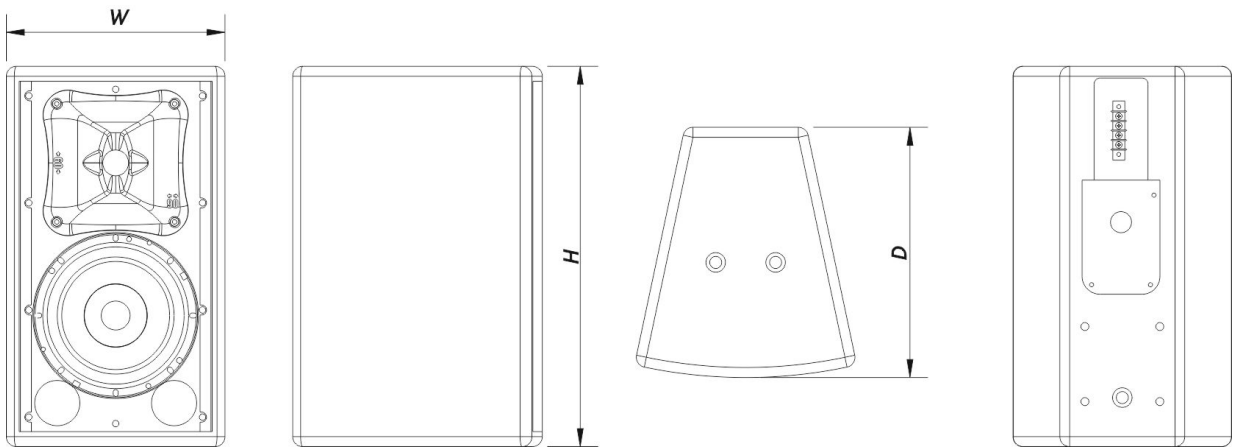

WR-9606-CX

ORDERING INFORMATION

Model	Description	P/N
System		
WR-9606-CX		10428263
Replacement Parts		
6B	Cone Transducer	20208260
BCT-96	Horn	30006201
F-HN06.96	Filter Network	20150040
GM-M26	Diaphragm	20205050
M-26	Compression Driver	10207070
Accessories		
ANL-2	Rigging Accessories	10101020
AXR-AR5	Installation & Stacking Acc.	10104870
AXU-WR9606	Installation & Stacking Acc.	10105148
AXW-1	Installation & Stacking Acc.	10104140

WR-9606-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 07/07/2026

