




CYCLOPS

L I G H T I N G

CL200B-E


CL200B-E, a 10,000h discharge lamp, the perfect combination of output, life and power consumption. It is a "milestone" unit with intense and parallel beam effect. The fixture is small size and lightweight. The 3 phase motor bring you extremely fast movement speed, versatile features include 14+1 colors, 17+1 gobos, focus, rotating 8 facets prism, shutter and dimmer.

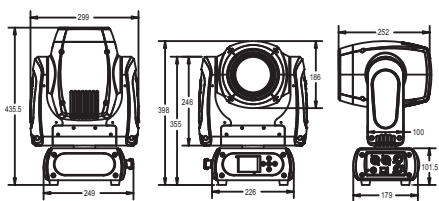

Dimension and Weight

- Fixture: 300X188X435MM
- Packing: 510X370X260MM
- Net Weight: 10KG
- Gross Weight: 12KG

BEAM ANGLE 2°

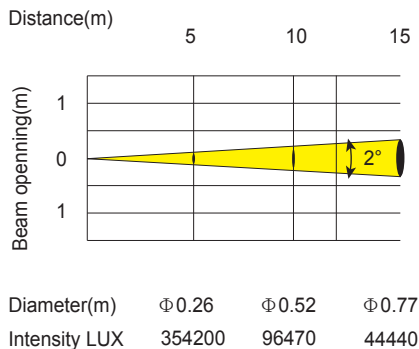

CHANNEL

CH1	Pan
CH2	Pan fine
CH3	Tilt
CH4	Tilt fine
CH5	Movement Speed
CH6	Movement Function
CH7	Shutter Function
CH8	Shutter
CH9	Dimmer
CH10	Color Function
CH11	Color
CH12	Gobo Function
CH13	Gobo
CH14	Prism&Prism Rot
CH15	Focus
CH16	Control

SPECIFICATION:

Light source: Osram Sirius HRI 132W discharge lamp

Lamp life: 10.000 hours

Luminous Flux: 6200lumen, 354200lux@5m

Control: Remote on/off via DMX

Ballast: switching mode power supply

Pan: 360° (2.8 sec) or 540°(2.0 sec), Tilt: 265° (1.8 sec)

3 phase motor for fast and quiet movement

16-bit resolution

Auto repositioning

DMX channels: 13/16/10/12

Color wheel: 14+1 colors

Static gobo wheel: 17+1 gobos

Motorized focus

Full range 0-100% dimmer

Various strobe

8 facets rotating Effect wheel

RDM function to change DMX address, display flip, X/Y

Reverse and so on

RDM read voltage, current, power consumption of lamp

Software upgrade via DMX

Hibernation when lost DMX for preset time

Indicate temperature info of base, arm and lamp

Fan speed auto change according to temperature

Max power consumption: 250W

Powercon in and out

Power supply: Electronic auto-ranging

Input voltage range: 100-240V, 50-60Hz

2.4inch super nice LCD display with friendly English/menu

Auto lock

Flip

Back-up communicating IC

17+ open static gobos

Real indexable and gobo shaking

Distinctive gobo animation effect

14+open, interchangeable, indexable and bidirectional rainbow effect

Color bounce

Mounting points: 2 ¼-turn locks

1 x Omega brackets with ¼-turn quick locks

Safety rope