




Power Container Xtreme Outdoor CPC63-C1-H4- CBM

1x CEE63A IN – 4x E16 Multipin OUT – 1x cPot OUT –
Circuit breakers

Power Container is a highly reliable, rugged and first level powerful distribution solution. The Power Container allows reduction of cabling effort & cost, circuit protection and power measurement. It is ideally suited for demanding mobile applications esp. video walls, lighting, and others.

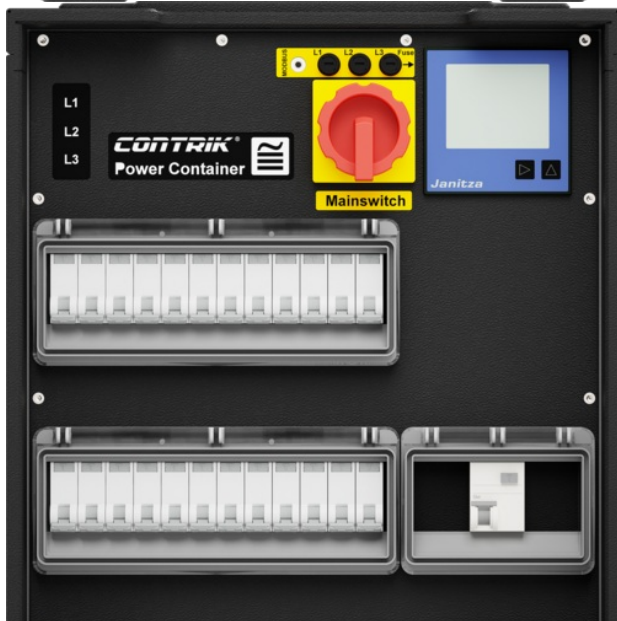



Features & Benefits

- **High durability & protection:** rugged Easylen® housing with high IK, IP44 with CEE / cPot in mated condition, self-closing caps, connector protection, flame retardant & non-conductive housing material
- **Easy transport & handling:** compact, stackable, fully lockable, integrated handles
- **Reduction of cabling volume and effort** due to 4x Harting E16 Multipin Outs
- **Minimization of failure impact on the event.** Due to separate protection of each OUT channel against overload and electric shock (63A version)
- **High quality of component and assembly** add to high reliability and safety of the power distribution and the event

Markets & Applications

- Markets: LED walls, Lighting, Other
- Mobile applications: Festivals, live events
- Semi-permanent applications: Theaters, studios, fairs

Order information

Technical Information

Product	
Input device	1x CEE63A 5P red
Output device	4x Harting E16 6ch [1-9] (24 RCBOs) 3x PowerCON TRUE1 TOP (1x RCBO) 1x cPot
Main switch	4pol
Power meter	Janitza UMG96-S2 3-Conductor illuminated, Modbus (for HS)

Electrical	
Circuit protection	25x RCBO (1-pole + N)
Phase control indicator	L1, L2, L3, green
Rated voltage	415V/AC, 50Hz
Rated Current	In: 63A

Mechanical

Type of construction	Stackable
Dimensions	ca. 395 x 295 x 405 mm
Weight	17,9 kg

Material

Housing	Easylen®
Color	black

Environmental

Protection class	IP44 with CEE and cPot in mated condition
Temperature range	-5 °C to +40 °C