





# LiveTekk WP

## The ultimate touring LED screen

It boasts a robust, weather-resistant design built to thrive in various conditions, with a fast lock system for easy set up and dismantling. Its high-brightness and high heat dissipation capabilities offer resilience to extreme temperatures, humidity, and dust while ensuring outstanding visual performance and extreme durability. It delivers clear, vibrant images capable of outdoor movie screening. LiveTekk WP is a must-have for every rental business.

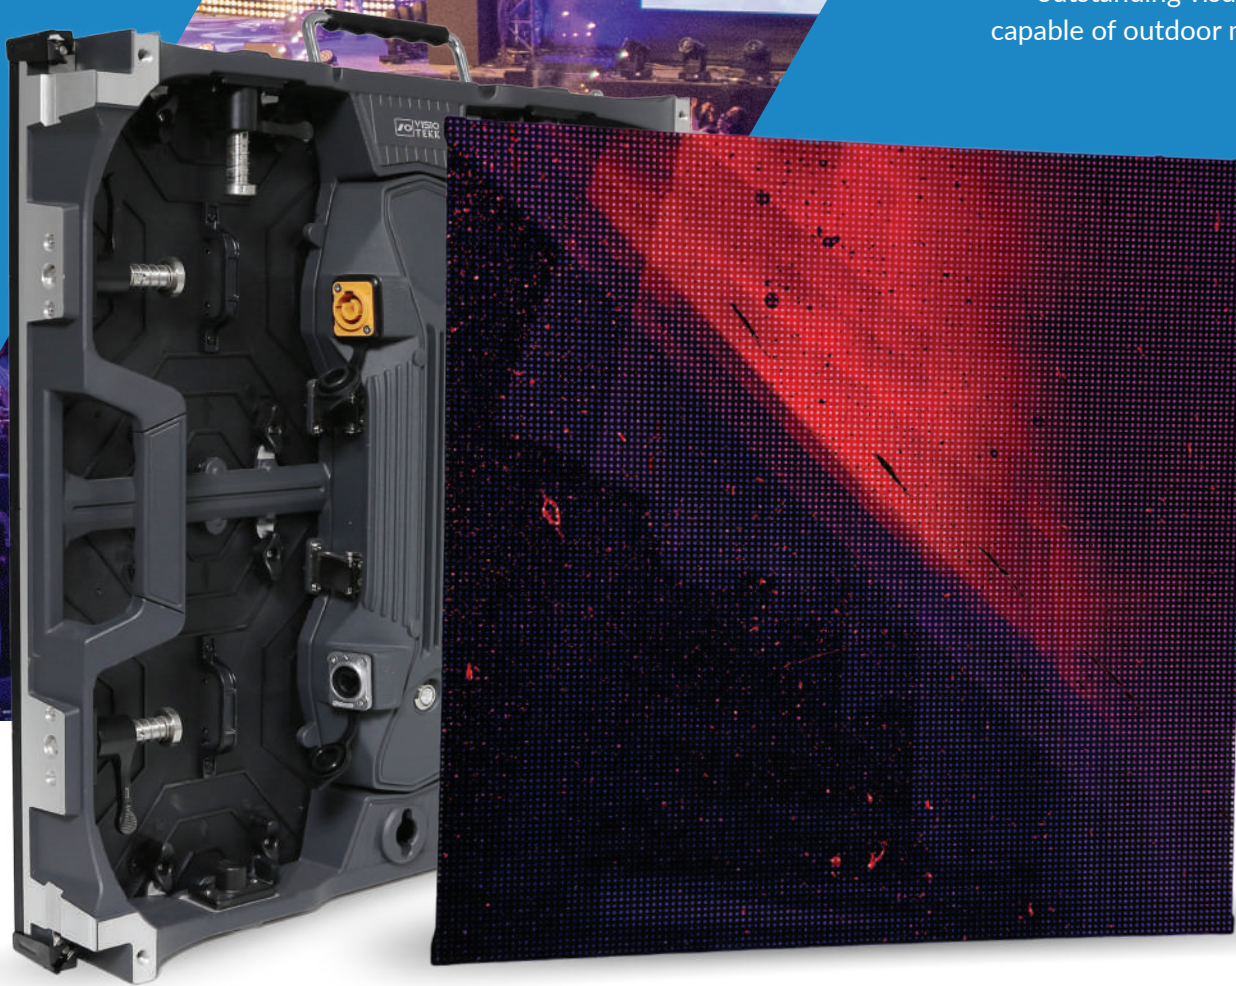

Pixel Pitch (mm)  
**2.976-4.81**



Maximum Brightness  
**4500 cd/m<sup>2</sup>**



Cabinet Material  
**Die-Cast Aluminum**



IP Rating  
**Outdoor**



Refresh Frequency  
**≤ 3840Hz**

	<b>P2.976-500x500</b>	<b>P3.91-500x500</b>	<b>P4.81-500x500</b>
<b>Order Number</b>			
Curve Panel	VT-OD-P297-500x500-C-LT-WP	VT-OD-P391-500x500-C-LT-WP	VT-OD-P481-500x500-C-LT-WP
Straight Panel	VT-OD-P297-500x500-LT-WP	VT-OD-P391-500x500-LT-WP	VT-OD-P481-500x500-LT-WP
<b>Resolution</b>			
Pixel Pitch (mm)	2.976	3.91	4.81
Cabinet Resolution	168x168	128x128	104x104
LED Configuration	SMD1921	SMD1921	SMD1921
<b>Image Output</b>			
Maximum Brightness (cd/m <sup>2</sup> )	≤ 4500	≤ 4500	≤ 4500
Refresh Frequency (Hz)	≤ 3840	≤ 3840	≤ 3840
Scan Ratio	1/16	1/16	1/16
<b>Panel Features</b>			
IP Rating	Outdoor	Outdoor	Outdoor
Cabinet Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
Serviceability	Front/Rear	Front/Rear	Front/Rear
Curving Concave	5° / 10° for curved model	5° / 10° for curved model	5° / 10° for curved model
Curving Convex	5° / 10° for curved model	5° / 10° for curved model	5° / 10° for curved model
Viewing Angle Vertical	140°	140°	140°
Viewing Angle Horizontal	140°	140°	140°
Transparency	Solid	Solid	Solid
Operational Temperature (°C)	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
Operational Humidity (%)	10% ~ 60%	10% ~ 60%	10% ~ 60%
<b>Power Consumption</b>			
Maximum Power Consumption (W/m <sup>2</sup> )	800	800	800
Average Power Consumption (W/m <sup>2</sup> )	250	250	250
<b>Size &amp; Weight</b>			
Cabinet Size (LxWxH) (mm)	500 x 500 x 75	500 x 500 x 75	500 x 500 x 75
Module Size (LxW) (mm)	250 x 250	250 x 250	250 x 250
Cabinet Weight (Kg)	≤ 8	≤ 8	≤ 8

