


LumiGo™ BOOK610

LumiGo™ BOOK610 is a **battery-operated outdoor LED Wash** that offers exceptional flexibility with **CRMx wireless control and iOS/Android/Windows app compatibility**, allowing for effortless customization and remote operation.


Designed in a compact, rugged housing, it features easy adjustable angling to direct the light precisely where it's needed. Powered by **6x10W RGBW LEDs**, it delivers a vibrant and sharp wash with a native 12° beam angle, providing bright, saturated color output. With an IP65 rating, it ensures reliable performance in any environment.

The kit **LGBOOK610-KIT8** includes:

- 8 x LumiGo™ BOOK610 (LGWASH610)
- 8 x Magnetic Frost Filter 10°x60° (FF15-LGWASH610)
- 1 x Flight Case (FC-LGWASH610)

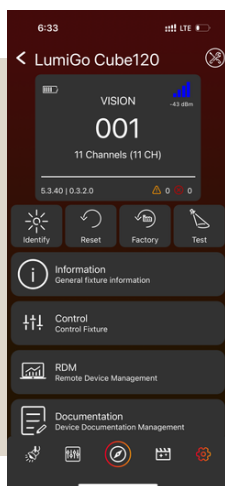

LumiGo™ BOOK610 can be **easily controlled via iOS, Android, and Windows applications**, providing seamless integration and convenient remote operation. This app control feature allows you to **adjust key settings directly from your mobile devices** or computers. With **CRMx wireless DMX**, users can effortlessly manage the LumiGo™ fixtures during live events, installations, and productions, ensuring flexibility and real-time adjustments. This functionality eliminates the need for complex hardware setups and allows for more dynamic control, making it ideal for fast-paced environments.



Specifications

SOURCE	SPECIFICATION	OPTICAL SYSTEM	SPECIFICATION
Light Source	6x10W RGBW LED	Beam Angle	20°
Output	Light output all LEDs on:1358 LM Light output red:292 LM Light output green:534 LM Light output blue:94 LM Light output white:625 LM	Frost Filter (Optional)	5° (FF15-LGWASH610, included in kit)
Illuminance	Lux @ 2m:4712 LX Lux @ 5m:754 LX Lux @ 8m:295 LX Lux @ 10m:189 LX	ELECTRICAL	SPECIFICATION
LED Life Expectancy	50,000 hours	Input Voltage	DC 18V-20V
		Max. Power Consumption	53W
		LED PWM Frequency	600/1.2K/2.4K/4.8K/12K/18K (hz)

Specifications

CONTROL & DISPLAY	SPECIFICATION
Control Protocols	DMX/RDM, CRMX Wireless DMX, iOs/Android/Windows Application control, Remote control, Manual
Channel Mode	2, 3, 5, 8, 11, 15 channels
Display Type	LCD

BATTERY	SPECIFICATION
Battery Life	Up to 19H
Battery Options	16 options selection between 4H to 19H with 1 hour increments
Battery Charge Time	4.5H

EFFECTS	SPECIFICATION
Dimming	0-100% linear adjustment
Dimming Curves	4
Color Mixing	RGBW
Color Temp Adjustments	3000 to 10000K
Electronic Strobe	0 - 20 Hz

PHYSICAL	SPECIFICATION
Material	Aluminum
IP Rating	IP65
IK Rating	IK07
Operating Temp.	-20°~50°C
Humidity	98%
Dimensions	225 x 150 x 130.5 mm
Weight	3.3 Kg

Accessories

Frost Filter 10°x60° (FF15-LGWASH610)

The 10°x60° Frost Filter softens light, expanding the beam for a diffused wash. It minimizes harsh edges and shadows, ensuring even coverage. Ideal for stage, architectural, and outdoor lighting, it provides flexibility for creating smooth, uniform illumination across large areas.



Flight Case (FC-LGWASH610)

The Flight Case protects LumiGo™ BOOK610 fixtures and accessories during transport. It integrates a charging box for efficient charging. This streamlines setup, ensuring reliable power for extended use, while keeping equipment organized and secure in a single, compact unit.



Explore more

