

INTEGRAL series



INTEGRAL-MA1604

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 21/07/2026



KEY FEATURES

- 4 CH Matrix amplifier with high-performance integrated DSP
- 400 W per channel @ 4 ohms
- High Efficiency Class D topology
- Low Z and High Z (Bridged 70 V/100 V) operation
- 4 independent analog inputs
- 2 inputs with selectable MIC/Line option and phantom
- 4 x 4 CH DANTE Digital Audio
- ALMA management control and monitoring

DESCRIPTION

INTEGRAL-MA1604 is a 4CH (4x400W at 4ohm), 2U rack matrix-amplifier intended for permanent installation with integrated processing DSP (4 analog inputs, 8 analog outputs) and DANTE (4x4) digital Audio. Control, configuration and management of the amplifier shall be done via ALMA software over IP or using Open Sound Control (OSC) protocol. DANTE audio channels can be processed and injected back into the network if needed. The amplifier can be used with Lo Impedance lines or Hi Impedance 100V/70V lines.

Priority capabilities, full matrix and routing options make this unit essential as the "brain" of any type of installation. The internal memory resources allow to store more than 100 "global presets" and more than 200 "output channel presets" (speaker presets). A bank of output channel presets with specific processing parameters for all DAS Audio speakers is included allowing the users to configure each channel independently. For instance, it would be possible to recall for amp 1 the preset of Q-23T, for amp 2 the preset of Arco-4T, for amp 3 the preset of Q-10 etc.

The unit includes an OLED display (1.54") with control knobs for intuitive and easy navigation as well meters to monitor signal levels. Basic parameters can be accessible via front panel control knobs; input and output levels, global preset recall, output channel preset recall, mute, source selection, link manager functions, priority enabling etc.

Two of the analogue inputs can be switched to microphone with 12V Phantom power if needed.

The unit also Integrates an Ethernet Switch for daisy-chain connections. No external switch is needed.

WiFi and Bluetooth are available for direct wireless operation.

INTEGRAL-MA1604

SPECIFICATIONS

Output Power Ratings

Amplifier Channels	4
Power 8 Ohms	4 x 200 W
Power 8 Ohms Bridged	2 x 800 W
Power 4 Ohms	4 x 400 W
Power 100 V	2 x 800 W
Power 70 V	2 x 800 W

Electronics and Audio

Amplifier Output Circuitry	Class D
Frequency Response	20 Hz-30 kHz (+0 - 0.5 dB)
Input Sensitivity	+20 dBu
Max Input Level	+22 dBu
Voltage gain	17.5 dB
Controls	Power On/Off, Navigation knobs
Display	OLED 1.54"
Cooling	Side-Right-to-Left
Amplifier Protections	Short Circuit, DC Output, Temperature, Over/Under Voltage
LED Indicators	On, Comms, Signal, Protect
Sampling Rate	48kHz

INTEGRAL-MA1604

Connectors

Analog Audio Input Connectors	2 x 3.5 mm Pitch Terminal Block
Analog Audio Output Connectors	2 x 3.5 mm Pitch Terminal Block
DANTE Digital In/Out Connectors	2 x RJ45 Fast Ethernet
Speaker Output Connector	Terminal Block

Power

AC Input Connector	IEC
Power Supply	Universal Mains Switch Mode
Operating Range	90-250 VAC
Current Draw 230 V / 115 V	3.0 A / 6.0 A

INTEGRAL-MA1604

DSP

Analog Input Channels	4
Analog Output Channels	8
DANTE Input Channels	4
DANTE Output Channels	4
AD Converters	24 Bit @ 48 kHz 118dBA Dynamic Range
DA Converters	24 Bit @ 48 kHz 118dBA Dynamic Range
Internal Precision	32 Bit, 64 Bits Double Precision
Latency	1ms
Delay	50ms per input / 120ms per output
Equalizer	LCD
Crossover	Linkwitz-Riley, Butterworth, Bessel
High and Low Pass Filters	up to 48dB/oct
Limiters	RMS, Peak
Load Monitoring	Yes

Dimensions-Weight


Dimensions (H x W x D)	88 x 483 x 208 mm 3,5 x 19,0 x 8,2 in
Net Weight	3,8 kg (8,2 lb)

INTEGRAL-MA1604

Shipping

Carton Dimensions (H x W x D)	170 x 525 x 315 mm
	6,7 x 20,7 x 12,4 in
Shipping Weight	4,5 kg (9,9 lb)

DIMENSIONS

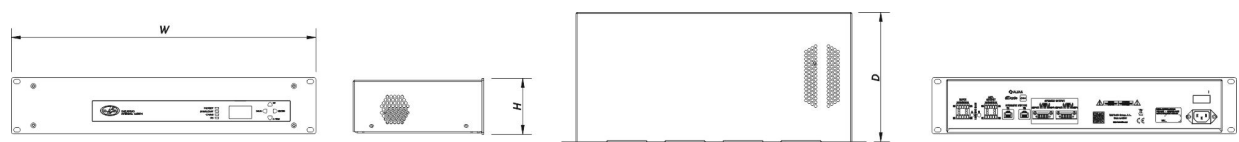

INTEGRAL-MA1604

ORDERING INFORMATION

Model	Description	P/N
System		
INTEGRAL-MA1604		10721160
Replacement Parts		
KIT-DSP-INTEGRAL-MA1604	Replacement Dsp	20407020
L-A2	Power Module	20406645
L-PRO2	Power Module	20406644

INTEGRAL-MA1604

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 21/07/2026

