K-ARRAY
Unique Audio Solutions

Rumble-KU212

Ultra-compact, powerful, outdoor suitable subwoofer



Description

The Rumble-KU212 is an ultra-thin, highpower passive subwoofer designed as the perfect companion to the K-array's mid-high speakers. A combination of extended frequency response with prodigious output and a discreet form factor make the KU212 an ideal solution for complex medium and large-format projects like bars, lounges, home cinemas, and small clubs. One of the largest subwoofers of the K-array's Rumble line, it is comprised of a 12" neodymium transducer combined with a 12" passive transducer that makes it impenetrable by foreign objects such as dust, sand or water, which over time can ruin a speaker.

The KU212 is made entirely up of steel, making it extremely resistant, even when deployed outside in tough weather conditions. All these properties make it ideal for aquatic environments where ordinary bass speakers would get damaged in a short time. On request, the Marine version features even higher treatment against salt corrosion.

KA series amplifiers have a preset specifically optimized for KU212. Measuring 65,0 cm x 33,0 cm x 20,0 cm (25.8" x 13.0" x 7.9") and weighing 18kg, the KU212 is available in elegant black or subtle white and can be customized in any RAL color as well as brushed or polished steel, or with 24 K gold, rose gold, or antique gold plating, making it easy to blend in or grab attention - depending on your aim - in a variety of spaces.

The main product models and codes are:
KU212 black model
KU212W white model
KU212X customizable color and finish (box + grille)
new! KU212M, KU212MW, KU212MX (only RAL colors) = MARINE TREATMENT (on request)


All Rumble-KU212 components are designed by the K-array R&D department and are custom-made under the K-array quality control system in Italy.


Technical specifications	
Type	Passive subwoofer
Transducers	12" neodymium magnet woofer 12" passive radiator
Frequency Response [1]	35 Hz - 150 (-6 dB)
Max SPL [2]	130 dB (peak)
Rated Power	700 W
Coverage	Omni
Nominal Impedance	4 / 16 Ω selectable
Connectors	4PIN euroblock connector (included)

Handling & Finishes	
Material	Stainless Steel
Colors	Black, White, Custom RAL
IP Rating [3]	IP64
Dimensions (WxHxD) [4]	(W x H x D): 655 x 330 x 200 mm (25.8 x 13.0 x 7.9 in)
Weight	18.5 kg (40.8lb)
Finishes	24K Gold, Rose Gold, Polished Steel, Brushed Steel

[1] With dedicated preset.
[2] Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.

Rumble-KU212

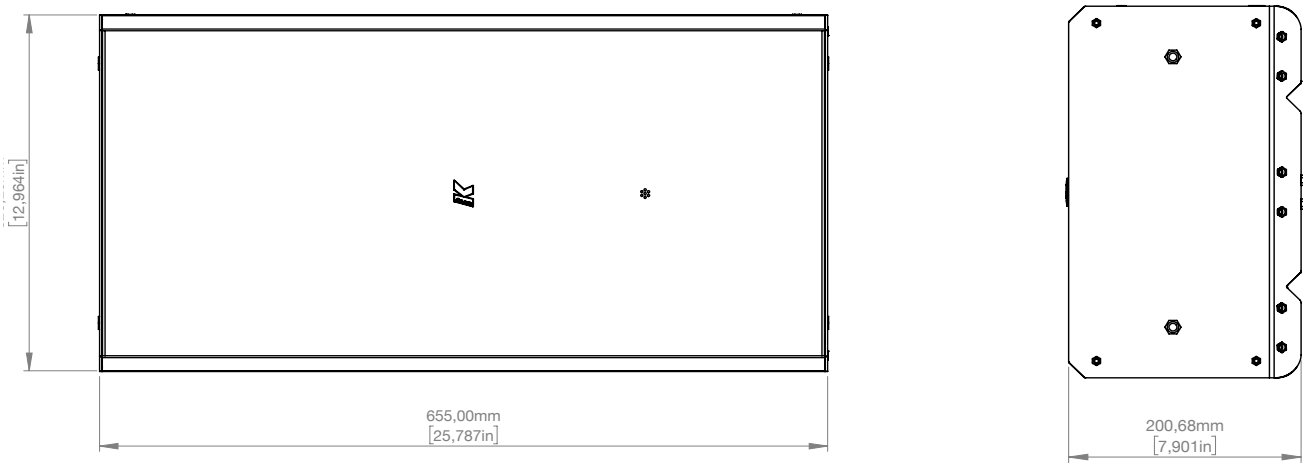

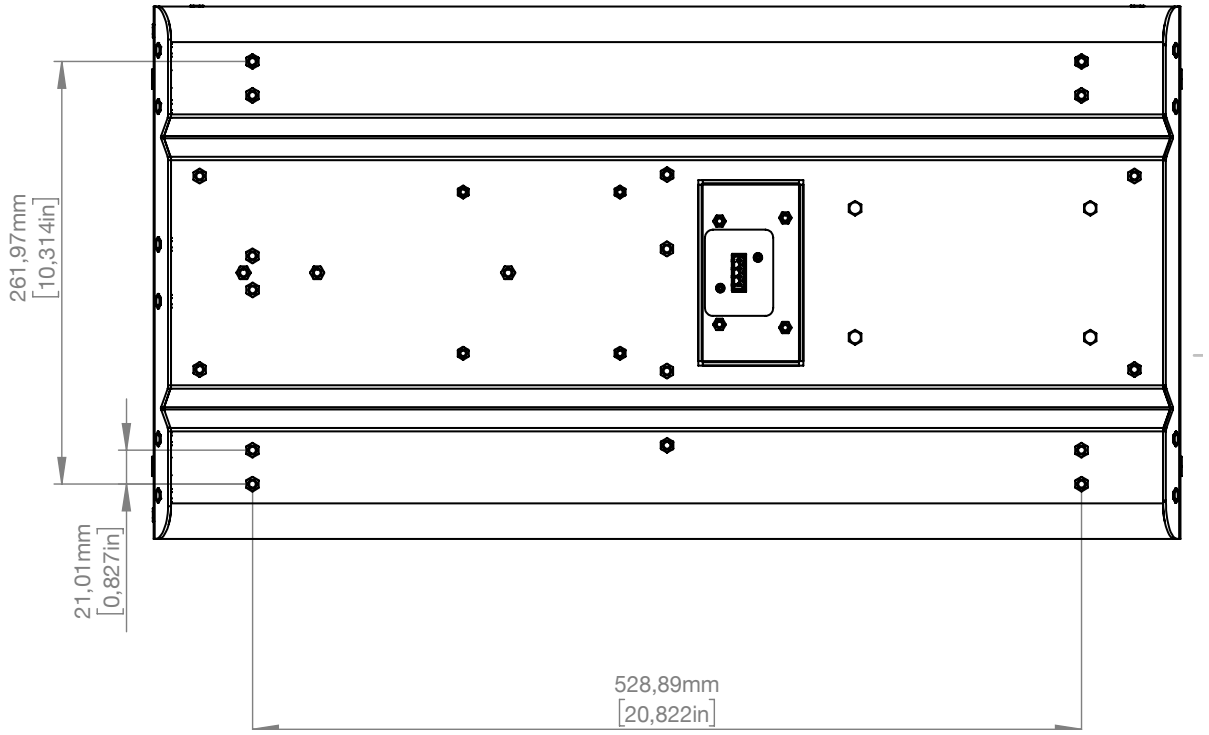

Notes:
Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.
New materials and designs are introduced into existing products without previous notice.
Present systems may differ in some respects from those presented in this catalog.